

SOUTHERN NEVADA VEHICLE INSPECTION CHECKLIST

GENERAL EQUIPMENT INFORMATION	
1. INCIDENT NAME/NO.	2. RESOURCE ORDER NO.
3. NAME	
4. AGREEMENT NO.	5. EXPIRATION DATE
6. MAKE/MODEL	7. EQUIPMENT TYPE/MODEL
8. VIN/SERIAL NO.	9. LICENSE NO./STATE

PRE-USE INSPECTION	Acceptable	
	YES	NO
1. "DOT" or CVSA inspection in the last 12 months (if required). *	<input type="checkbox"/>	<input type="checkbox"/>
2. Gauges and lights: mounted and function properly. * XXXXXXXXXX	<input type="checkbox"/>	<input type="checkbox"/>
3. Seat belts: operate properly for each seating position.	<input type="checkbox"/>	<input type="checkbox"/>
4. Glass and mirrors, no cracks in vision.	<input type="checkbox"/>	<input type="checkbox"/>
5. Wipers, washers, and horn operate properly. *	<input type="checkbox"/>	<input type="checkbox"/>
6. Clutch pedal: proper adjustment (if applicable). *	<input type="checkbox"/>	<input type="checkbox"/>
7. Cooling system: full, free of leaks and damage. *	<input type="checkbox"/>	<input type="checkbox"/>
8. Fluid levels (e.g. oil) and condition: full and clean. *	<input type="checkbox"/>	<input type="checkbox"/>
9. Battery: check for corrosion, loose terminals and hold down [†] .	<input type="checkbox"/>	<input type="checkbox"/>
10. Fuel system: free of leaks and damage. *	<input type="checkbox"/>	<input type="checkbox"/>
11. Electrical system: alternator and starter work.	<input type="checkbox"/>	<input type="checkbox"/>
12. Engine running: check oil pressure, knocks, and leaks. *	<input type="checkbox"/>	<input type="checkbox"/>
13. Transmission: check for leaks. *	<input type="checkbox"/>	<input type="checkbox"/>
14. Steering components: tight, free of play.	<input type="checkbox"/>	<input type="checkbox"/>
15. Brakes: damaged, worn or out of adjustment.	<input type="checkbox"/>	<input type="checkbox"/>
16. 4-Wheel drive: check transfer case, leaks (if applicable). *	<input type="checkbox"/>	<input type="checkbox"/>
17. Drive line U-joints: check for looseness. *	<input type="checkbox"/>	<input type="checkbox"/>
18. Suspension systems: springs, shocks, other.	<input type="checkbox"/>	<input type="checkbox"/>
19. Differential(s): check for leaks.	<input type="checkbox"/>	<input type="checkbox"/>
20. Exhaust system: no leaks under cab or before turbo.	<input type="checkbox"/>	<input type="checkbox"/>
21. Tires/wheels (including spare and all changing equipment) sufficient load rating, tread depth, no major damage.	<input type="checkbox"/>	<input type="checkbox"/>
22. Frame condition, body/bed properly attached. *	<input type="checkbox"/>	<input type="checkbox"/>

PRE-USE INSPECTION	
MILES/HRS _____	DATE _____
Inspector's printed name _____ Title _____	
Inspector's signature _____	

Section III—LIABILITY
The purpose of this checklist is to document pre-existing vehicle/equipment condition and to determine suitability for incident use. I hereby acknowledge full responsibility and liability for the operation and mechanical condition of the vehicle/equipment described herein.
Operator's printed name _____ Title _____
Operator's signature _____ Date _____

POST-USE INSPECTION	Acceptable	
	YES	NO
1. "DOT" or CVSA inspection in the last 12 months (if required). *	<input type="checkbox"/>	<input type="checkbox"/>
2. Gauges and lights: mounted and function properly. *	<input type="checkbox"/>	<input type="checkbox"/>
3. Seat belts: operate properly for each seating position. *	<input type="checkbox"/>	<input type="checkbox"/>
4. Glass and mirrors, no cracks in vision. *	<input type="checkbox"/>	<input type="checkbox"/>
5. Wipers, washers, and horn operate properly. *	<input type="checkbox"/>	<input type="checkbox"/>
6. Clutch pedal: proper adjustment (if applicable).	<input type="checkbox"/>	<input type="checkbox"/>
7. Cooling system: full, free of leaks and damage.	<input type="checkbox"/>	<input type="checkbox"/>
8. Fluid levels (e.g. oil) and condition: full and clean.	<input type="checkbox"/>	<input type="checkbox"/>
9. Battery: check for corrosion, loose terminals and hold downs.	<input type="checkbox"/>	<input type="checkbox"/>
10. Fuel system: free of leaks and damage. *	<input type="checkbox"/>	<input type="checkbox"/>
11. Electrical system: alternator and starter work.	<input type="checkbox"/>	<input type="checkbox"/>
12. Engine running: check oil pressure, knocks, and leaks.	<input type="checkbox"/>	<input type="checkbox"/>
13. Transmission: check for leaks.	<input type="checkbox"/>	<input type="checkbox"/>
14. Steering components: tight, free of play. *	<input type="checkbox"/>	<input type="checkbox"/>
15. Brakes: damaged, worn or out of adjustment. *	<input type="checkbox"/>	<input type="checkbox"/>
16. 4-Wheel drive: check transfer case, leaks (if applicable).	<input type="checkbox"/>	<input type="checkbox"/>
17. Drive line U-joints: check for looseness.	<input type="checkbox"/>	<input type="checkbox"/>
18. Suspension systems: springs, shocks, other. *	<input type="checkbox"/>	<input type="checkbox"/>
19. Differential(s): check for leaks.	<input type="checkbox"/>	<input type="checkbox"/>
20. Exhaust system: no leaks under cab or before turbo. *	<input type="checkbox"/>	<input type="checkbox"/>
21. Frame condition, body/bed properly attached. *	<input type="checkbox"/>	<input type="checkbox"/>
22. Tires/wheels (including spare and all changing equipment) sufficient load rating, tread depth, no major damage. *	<input type="checkbox"/>	<input type="checkbox"/>

25. Operator(s) properly licensed. † Expiration Date _____
State _____ License No _____ Class _____
Endorsement _____

RELEASE	<input type="checkbox"/> No Damage/No Claim	
MILES/HRS _____	DATE _____	TIME _____
Operator's printed name _____		Title _____
Operator's signature _____		Date _____
Inspector's printed name _____		Title _____

Section V—REMARKS	(Describe all unsatisfactory items and identify by line number)
--------------------------	---

Transport and Support Vehicles

Motor vehicle parts and accessories must be in Safe Operating Condition At All Times, FEDERAL MOTOR CARRIER SAFETY ADMINISTRATION (FMCSA) as prescribed by U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION PARTS 393 & 396, and NORTH AMERICAN UNIFORM OUT-OF-SERVICE CRITERIA, COMMERCIAL VEHICLE SAFETY ALLIANCE (CVSA).

REJECT IF: Parts and accessories covered in FMCSR part 393, 396 and/or CVSA North American Uniform Out-of-service Criteria are not in safe and proper operating conditions at all times. These include, but are not limited to the parts and accessories listed below.

2. Gauges and Lights (393.82, 393.11)

- ♦ Speedometer inoperative.
- ♦ All required lighting devices, reflectors and electrical equipment must be properly positioned, colored and working.

3. Seat Belts (393.93)

- ♦ Any driver or right outboard seat belt missing or inoperative.

4. Glass and Mirrors (393.60, 393.80)

- ♦ Any discoloration not applied by the manufacturer for reduction of glare.
- ♦ Any windshield crack over 1/4" wide.
- ♦ Any crack less than 1/4" wide that intersects with any other crack.
- ♦ Any damage 3/4" or greater in diameter.
- ♦ Any 2 damaged areas closer than 3" to each other.
- ♦ Any required mirror missing. One on each side, firmly attached to the outside of the vehicle, and so located as to reflect to the driver a view of the highway to the rear along both sides of the vehicle.
- ♦ Any required mirror broken.

5. Wipers and Horn (393.78, 393.81)

- ♦ Wiper blade(s) fail to clean windshield within 1" of windshield sides.
- ♦ Horn missing, inoperative or fails to give adequate/reliable warning signal.

10. Fuel System (393.65, 393.67)

- ♦ Fuel tank not securely attached to vehicle by reason of loose, broken or missing mounting bolts or brackets.
- ♦ Visible leak at any point.
- ♦ Fuel tank cap missing.

14. Steering (393.209)

- ♦ Steering wheel does not turn freely, has any spokes cracked through or is missing any parts.
- ♦ Steering lash not within parameters, see chart in FMCSA 393.209.
- ♦ Steering column is not secure.
- ♦ Steering system; any U-joint worn, faulty or repaired by welding.
- ♦ Steering gear box is loose, cracked or missing mounting bolts.
- ♦ Pitman arm is loose, or has any welded repairs.
- ♦ Power Steering; any component is inoperative. Any loose, broken or missing parts. Belts frayed, cracked or slipping.
- ♦ Any fluid leaks, fluid reservoir not full.

15. Brakes (393.40-393.55)

- ♦ Brake system has any deficiencies as described in FMCSA.
- ♦ Brake system has any missing, loose, broken, out of adjustment or worn out components.
- ♦ Brake system failure warning device missing, inoperative, or fails to give adequate warning.
- ♦ Brake system has any air or fluid leaks.

18. Suspension Systems (393.207)

- ♦ Any axle positioning part is cracked, broken, loose or missing. All axles must be in proper alignment.
- ♦ Any leaf spring cracked, broken, missing or shifted out of position.
- ♦ Adjustable axle assemblies with locking pins missing or not engaged.

20. Exhaust (393.83)

- ♦ Any part of the exhaust system so located as would be likely to result in charring, burning, or damaging the wiring, fuel supply or any combustible part of the vehicle.
- ♦ Bus exhaust leaks or discharge forward of the rearmost part of the bus in excess of 6" for Gasoline powered or 15" for other than Gasoline powered, or forward of any door or window designed to be opened on other than a Gasoline powered bus. (Exception: emergency exit).
- ♦ Any leak at any point forward of or directly below the driver and/or sleeper compartment.

21. Frame (393.201)

- ♦ Any cracked, broken, loose or sagging frame member.
- ♦ Any loose or missing fasteners including those attaching engine, transmission, steering gear, suspension, body, and fifth wheel.
- ♦ Any condition that causes the body or frame to contact the tire or wheel assemblies.

22. Tires and Wheels (393.75, 393.205)

- ♦ Any body ply or belt material exposed through tread or sidewall.
- ♦ Any tread or sidewall separation.
- ♦ Any cut exposing ply or belt material.
- ♦ Tread depths less than 4/32" on steering axle.
- ♦ Less than 2/32" on any other axle.
- ♦ Any bus with regrooved, recapped, or retreaded tires on the front wheels.
- ♦ Any tire not properly inflated or any overloaded tire.
- ♦ Any tire that comes in contact with any part of the vehicle.
- ♦ Any tire marked "Not for Highway Use".
- ♦ Wheels or rims shall not be cracked or broken.
- ♦ Stud or bolt holes on the wheels shall not be elongated.
- ♦ Nuts or bolts shall not be missing or loose.

24. Emergency Equipment (393.95)

- ♦ Every power unit must be equipped with a fire extinguisher that is properly filled and readily accessible for use.
- ♦ Spare fuses or other overload protective device.
- ♦ Warning devices for stopped vehicles.

25. License (383.23, 391.41)

- ♦ No person shall operate a commercial motor vehicle unless such person has passed written and driving tests which meet the Federal Standards for the commercial motor vehicle that person operates.
- ♦ Persons shall not drive a commercial motor vehicle unless he/she is physically qualified to do so and has on his/her person the original, or a photographic copy, of a medical examiner's certificate that he/she is physically qualified.

IN ADDITION TO THE ABOVE:









Agency personnel reserve the right to reject any equipment due to any additional condition or combination of conditions that make the vehicle unsafe, unreliable, or may pose unreasonable damage to the environment, or will be unable to fully perform the duties for which the equipment has been hired.

The inspector shall inspect for compliance with the FMCSA, State and Local laws and regulations. Therefore, the Inspector must ACCEPT or REJECT all equipment he/she inspects.

Section IV, Item 23 - Truck, Bus, Van, Pickup, Body Condition Inspection

Pre-Use Inspection

Release Inspection

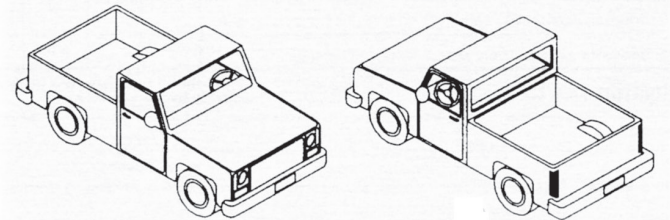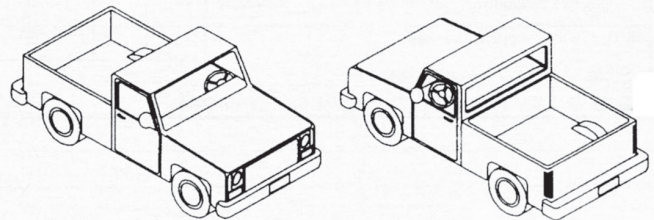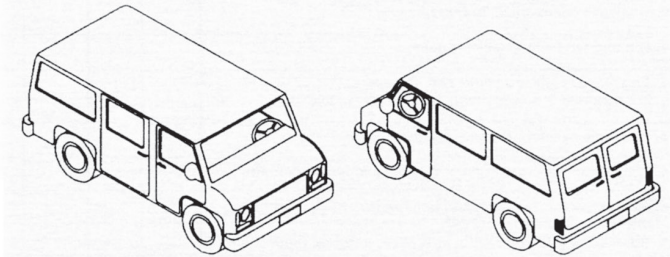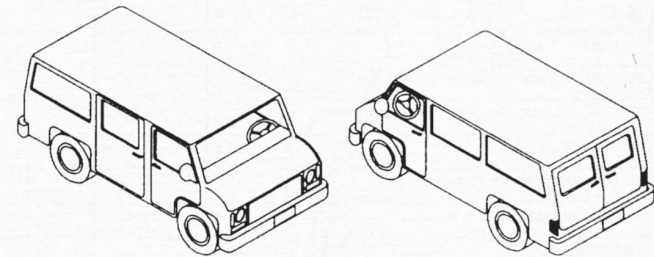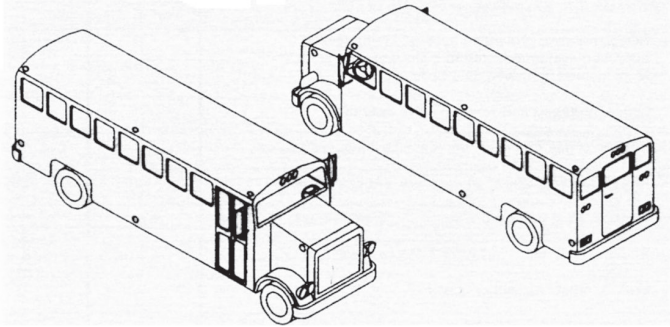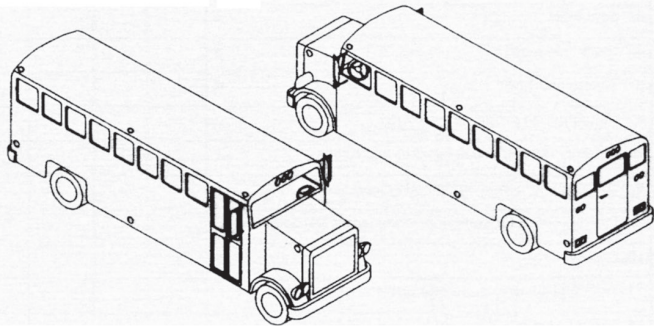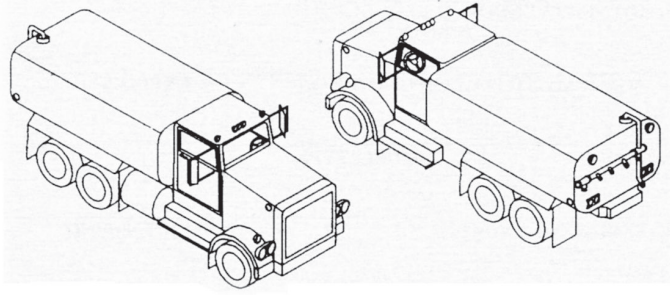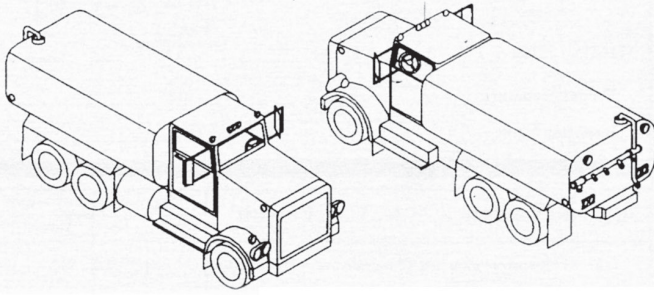

Remarks